

Attach the metal brackets to the window's top frame.




Tilt the top rail and set the rail on bracket's hooks.




Lock the bracket by turning the lever. The top rail might be slightly sloped because of glazing bead.



Place the turning rod's on it's ring. Cut the pull cords as short as possible, when blind is in lowest position. Fasten pull cord holders to window frame about twenty centimeters apart.

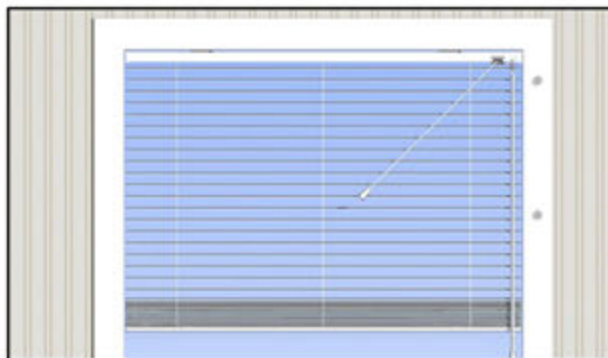

Lift the blind up by pulling the cords. Lower the blinds by pulling the cords toward the middle to unlock the cords. Then release the cords. Turn the rod for tilting slats.

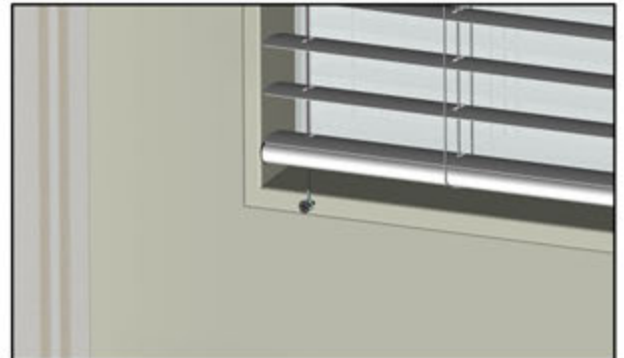

If optional guide wires are included, attach them tightly on the bottom frame of window. Guide wires must be straight to ensure blind operations.

## WARNING

YOUNG CHILDREN CAN STRANGLE IN THE LOOP OF PULL CORDS, TAPES AND CORDS THAT OPERATE WINDOW COVERINGS. THEY CAN ALSO WRAP CORDS AROUND THEIR NECKS.

TO AVOID STRANGULATION AND ENTANGLEMENT, KEEP CORDS OUT OF REACH OF YOUNG CHILDREN.

MOVE BEDS, COTS AND FURNITURE AWAY FROM WINDOW COVERING CORDS.